



BORMA WACHS[®]
Wood Professional Cosmetics
& Eco-Finishes

EXTERIORS





Company

We manufacture professional wood cosmetics for an eco-friendly way of life.

For decades BORMA WACHS has been working in the wood care and synthetic surface treatment sector with a sense of responsibility and constant commitment to pursuing three fundamental principles: quality, reliability and flexibility. The dynamism, production capacity, safety and marketability of our products characterise our company profile. As specialists in the professional cosmetics of wood and synthetic surfaces, we offer our customers only the best of the best.



Certifications

Our products and manufacturing cycles are regularly tested and approved by international institutes.



VOC FREE

All Borma Wachs branded products comply with the latest European legislation on emissions of potentially harmful substances into the atmosphere and have total regard for the environment and the health and wellbeing of our workers and our customers. With the new ECO PREMIUM - VOC FREE line we are able to offer an uncompromising range, with 100% natural and biodegradable products, with a VOC content reduced to zero.



IBR CERTIFICATIONS

Borma Wachs products are tested and approved by the Rosenheim Institute for Green Building. The analyses carried out certify our products regarding the content of VOC's, biocides, heavy metals and radioactive material guaranteeing their eco-compatibility with the principles of Green Building. The Company always aims to understand the needs and sensitivity of customers, trying to better interpret the request for sustainable and environmentally friendly treatments coming from the use of renewable raw materials, in order to reduce as much as possible the impact on environment and on the health of users and all stakeholders in our communities.



EN71.III CERTIFICATION

The Danish laboratories of Eurofins have recognised the compliance of Borma Wachs oils with the EN 71- III regulation on the migration of heavy metals harmful to health, ensuring the safety of the treatments to the point of allowing their use for finishing or maintenance of toys for children.

Exteriors

Aesthetic, Flexible, Tenacious

In regards to exteriors Borma aspires to guarantee the optimum protection of wooden surfaces while maintaining the same particular attention to natural raw materials, namely oils and waxes. In order to satisfy every need and to ensure durable protection oils, primers and topcoats are offered in different colours and formulations.





BORMA WACHS[®]
Wood Professional Cosmetics
& Eco-Finishes

INDEX

Page 6/11

Wood Preparation

Page 12/17

Roof- Cladding Finishes

Page 18

Specialties

Page 19

Equipment

Page 20

Garden Furniture

Page 21

VOC-FREE Oils

Page 22/25

Terraces & Decking

Page 26/27

Cleaning & Maintenance

Page 28

Maintenance Recommendations

Page 28/33

Recommended Application Cycles

Paint Removers

Extra Strong Paint Remover

RADIKAL ABBEIZER

For Wood

Removes all types of lacquer, including 2K polyurethanes. Complies with European safety standards. It is available in liquid and gel form. The gel version is particularly suitable for vertical surfaces. It does not contain methylene chloride, is non-corrosive and does not change the colour of the wood.



Recommendations for application:

Apply generously using a brush over the entire surface, leave to work for 10 - 20 minutes until the film softens, remove the old lacquer with steel wool or a brush. For particularly thick lacquer, repeat the operation.



Gel

Code	Desc.	Pack.
0031-ES	750 ml	06 pcs.
0032-ES	4 Lt	02 pcs.
0033-ES	20 Lt	

Liquid

Code	Desc.	Pack.
0034-ES	750 ml	06 pcs.
0036-ES	4 Lt	02 pcs.
0038-ES	20 Lt	

Gel Paint Remover

EXTRA STRONG UNIVERSAL PAINT STRIPPER

For all Surfaces

Extra strong gel paint remover with a special solvent blend suitable for any type of surface. Free from methylene chloride, and therefore without sales restrictions. A non-corrosive material which does not change the natural shade of the surface on which it is applied. For Professional Use.



Recommendations for application:

Apply generously, leave to work for 10-20 minutes and remove any residue. Suitable for wood, metal, walls and painted surfaces in general.



Code	Desc.	Pack.
0031-U	750 ml	06 pcs.
0032-U	4 Lt	02 pcs.
0033-U	20 Lt	

Water-Dilutable Paint Remover (Non-Soluble) - Chloride Free

ECO STRONG PAINT STRIPPER

For all Surfaces

A virtually odourless, water-dilutable strong gel paint remover that is free of methylene chloride, aromatic solvent and methanol. It does not change the natural shade of the wood. For Professional Use. Not subject to sales restrictions.



Recommendations for application:

The action of the water-soluble paint remover is more progressive than Extra Strong Paint remover. You are advised therefore to leave on for longer.



Code	Desc.	Pack.
NAT0031	750 ml	06 pcs.
NAT0032	4 Lt	02 pcs.
NAT0033	20 Lt	



Intensive Cleaning

Intensive Wood Cleaner - Gel

NATURAQUA EXTRA STRONG WOOD CLEANER

Ideal for removing stubborn dirt residue and old treatments and to degrease oily wood.

An intensive wood cleaner that removes stubborn dirt and previous treatments with an oil or alkyd base. It is also particularly useful to degrease exotic wood particularly rich in oils and extracts. In this case, you are recommended to dilute the product with water 1:1. Wet the surface with plenty of water before treatment to aid penetration.



Recommendations for application:

Due to the high concentration of organic substances, Extra Strong Wood Cleaner can change the natural colour of the wood, making it darker. To restore the original colour of the wood follow the process with an application of Borma Exterior Wood Cleaner.

+5°C
+30°C



Code	Desc.	Pack.
0091	1 Lt	12 pcs.
0092	5 Lt	02 pcs.
0093	10 Lt	
0094	25 Lt	

Wood Cleaner – Gel

NATURAQUA EXTERIOR WOOD CLEANER

Ideal for deteriorated wood and to revive natural colour.

A waterbased, one component cleaner with active organic ingredients which ensures efficient cleaning and prepares the surface for subsequent treatments, removing dirt residue and lightening the colour of the wood. Specifically for exterior use, the surface should be thoroughly rinsed with water after application.



Recommendations for application:

Wet the support with plenty of water by hosepipe or watering can before treatment. Rinse thoroughly and remove all residue.

+5°C
+30°C



Code	Desc.	Pack.
0075	1 Lt	12 pcs.
0076	5 Lt	02 pcs.
0075.10	10 Lt	
0075.25	25 Lt	

Wood Reviver

NATURAQUA BORMA NO GREY

Ideal for the removal of environmental greyness and to restore the natural colour of the wood

A waterbased detergent to restore wood to its natural colour. Remove surface greyness caused by decomposition of wood under the action of natural ultraviolet radiation. Apply to the wet surface, leave to act for 5 minutes, then clean the wood with a hard brush. After application, rinse with plenty of water. Ideal for reviving garden furniture, fences and decking.



Recommendations for application:

Scrub the surface with a paintbrush or brush whilst the surface is still wet. The result is immediate. If necessary, repeat the operation.

+5°C
+30°C



Code	Desc.	Pack.
SB5700	1 Lt	12 pcs.
SB6700	5 Lt	02 pcs.
SB5700.10	10 Lt	
SB5700.25	25 Lt	

Intensive Wood Cleaner

WHITENING 2K SUPER CLEANER

For Professional Use

A 2K product ideal for the intensive cleaning of wooden surfaces with a whitening effect. It efficiently removes mildew, dirt and residue from underlying exterior woodstain products. The product does not alter the structure of the wood fibre, but is corrosive on skin and therefore for Professional Use only.



Recommendations for application:

Use only synthetic brushes, containers, sponges and paintbrushes. The product can cause unwanted oxidation phenomena on metals and damage natural bristles. Only catalyse the quantity strictly necessary for immediate use. Do not keep the mix catalysed; dispose of any residue immediately after use.

+5°C
+30°C



Code	Desc.	Pack.
0062 + 0063	1Lt + 0,5Lt	12 pcs.
0068 + 0065	5Lt + 2,5Lt	02 pcs.
0066 + 0067	25Lt + 12,5Lt	

Primers and Sealers Borma Classic Line

Special Primer BORMA SHIELD

Designed to protect wooden structures before final painting as a surface barrier.

A specially formulated product to protect newly built wooden structures, whilst waiting for subsequent finishing treatments (in general, during the winter). It prevents the wood from greying, efficiently protects against the formation of mildew, fungi and insect infestation during the period in which the wood is left without a finish. It does not alter the natural colour. And is characterised by excellent penetration which enables the subsequent application of oils and any further finishing.



Recommendations for application:

The product can also be used as a pre-treatment before exterior woodstain products, lacquers or oils. Thanks to the high content of the active ingredients and its superior penetration the material guarantees greater protection and makes the coating last longer. For exterior use.



Customizable with Borma Colour System



Code	Desc.	Pack.
3630	1 Lt	06 pcs.
3631	5 Lt	02 pcs.
3632	10 Lt	
3633	20 Lt	

Special Insulating Primer BORMA SUPER SHIELD 2K

A high-performance 2- component, polyurethane based Primer with preservative and insulation properties ideally suited to resinous woods. Fast drying and with excellent sanding it is perfect for closed / semi-closed pore finishes. The cycle can be completed with Exterior Wood Lack 2k, Naturaqua Exterior Wood lack 2k or Decking Oil HD.



Recommendations for application:

It can be applied by brush, roller or spray. Suggested for professional use.



Code	Desc.	Pack.
36302K + 3630K	1 Lt.	06 pcs.
36312K + 3631K	5 Lt	02 pcs.
36322K + 3632K	10 Lt	
36332K + 3633K	20 Lt	

Heavy Duty Insulator HOLZWACHS LASUR ALF

Special for Bleached Surfaces.

Whitening 2K Super Cleaner effectively cleans wooden surface, whitening its shade. Apply Holzwachs Lasur ALF sealer after the bleacher in order to prevent the unwanted reaction between the finishing and bleaching agents. After drying allows the use of desired finishing products.



Recommendations for application:

Ensure the quantity of the material applied is sufficient to protect the surface. Holzwachs Lasur ALF can be tinted with Borma oil pigments.



Customizable with Borma Colour System



Code	Desc.	Pack.
3320XX-ALF	750ml	06 pcs.
3322XX-ALF	2,5Lt	02 pcs.
3330XX-ALF	5Lt	02 pcs.
3344XX-ALF	10Lt	
3340XX-ALF	20Lt	

Refurbishing Uniforming Basecoat

RINOVA

An odourless, uniforming basecoat with exceptional covering power that is ideal for restoring exposed external woodwork. Its high concentration ensures excellent covering after only one coat application even on grey, stained and deteriorated surface, excluding the need for intensive cleaning and sanding. This product protects and seals the treated surface, facilitating the application of succeeding finishes, whether semi-transparent for a natural effect of covering for a more decorative effect. Special protective ingredients prevent the attack of pathogens such as fungi and insects.




Recommendations for application:

RINOVA is quick drying, easy to apply and supplied ready for use. Use Holzwachs Lasur 3in1 or Dekorwachs Lasur 3in1 for the finishing coats.



Code	Desc.	Pack.
3350XX	375 ml	06 pcs.
3351XX	750 ml	06 pcs.
3352XX	2,5 Lt	02 pcs.
3353XX	5 Lt	02 pcs.
3350.10XX	10 Lt	
3350.20XX	20 Lt	

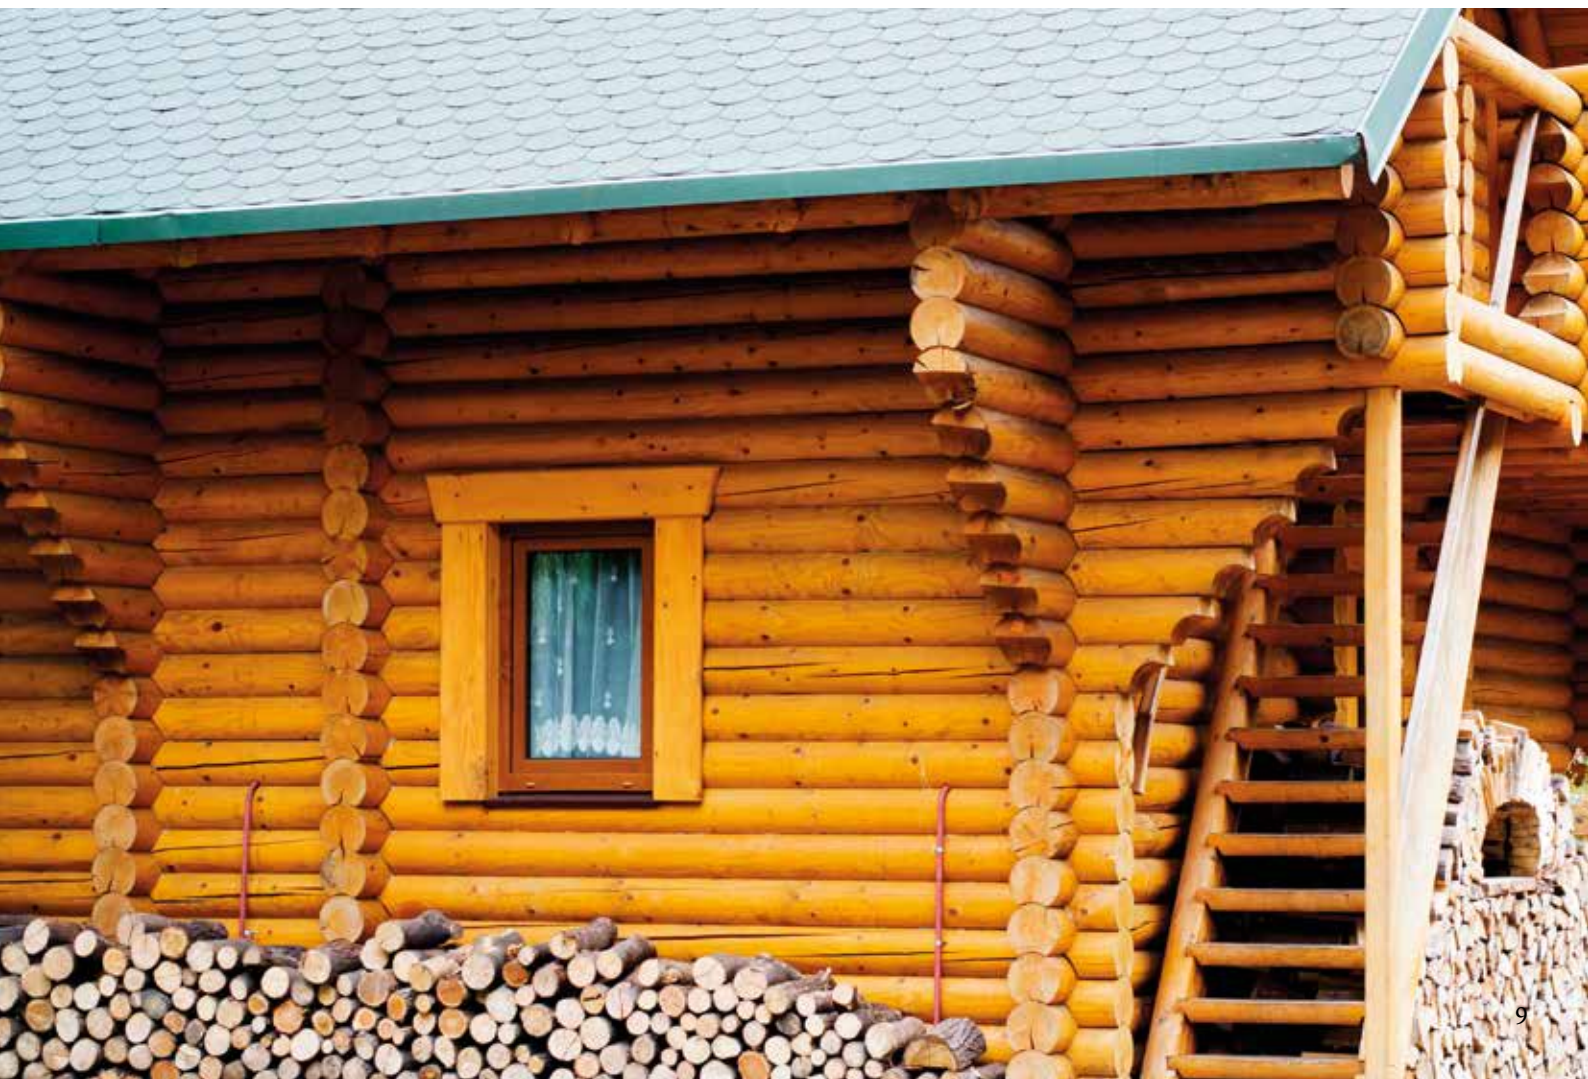

Primers and Sealers Borma Naturaqua Line

Special Protective Waterbased Primer NATURAQUA BORMA SHIELD

Designed to protect wooden structures before final painting as a surface barrier.

A waterbased, odourless and quick-drying Primer formulated to protect newly built, wooden structures while waiting for the subsequent finishes. It provides effective protection against mildew, fungi formation and insect infestation, even in the absence of other treatments. It does not change the colour of the wood and allows the subsequent application of any finish.



Recommendations for application:

The product can be used as a pre-treatment before exterior woodstain products, lacquers or finishes in general. Thanks to the high content of active ingredients, it is recommended for waterbased finishing cycles to guarantee greater protection and prolong the duration of the coating. For Exterior use.



Customizable with Borma Colour System

Code	Desc.	Pack.
NAT3630	1lt	06 pcs.
NAT3631	5Lt	02 pcs.
NAT3632	10Lt	
NAT3633	20Lt	

Hardwood Sealer NATURAQUA WOOD SEALER

Ideal for oily wood and as a "natural effect" fixative.

A clear, acrylic insulator for interior and exterior use that creates an imperceptible film for a "raw wood" effect.

Application areas:

- as a preliminary Sealer to guarantee good adhesion of waterborne finishes on oily, exotic woods such as teak, iroko and similar
- as a surface fixative for finishes with a "natural wood" effect.



Recommendations for application:

Catalyse the product with BORMA 4100-2K at 10:1 to improve its surface strength.



Customizable with Borma Colour System

Code	Desc.	Pack.
NAT4090	750 ml	06 pcs.
NAT4091	5 Lt	02 pcs.
NAT4090.10	10 Lt	
NAT4090.20	20 Lt	

Special Anti-tannin Sealer NATURAQUA SUPER WOOD SEALER

A waterbased sealer which provides a highly effective tannin-resistant barrier which avoids tannin bleed and allows subsequent waterbased finishes to be used without the migration of unpleasant yellow or brown stains. Available also in two component solvent-based high performance version as "Tannin Blocker 2K" -> BORMA PRO



Recommendations for application:

Available both as a transparent or white coat, it is ideal for light finishes. Applied in two coats, it does not require use of further bases before the finish.



Customizable with Borma Colour System

Code	Desc.	Pack.
NAT4090-S	750ml	06 pcs.
NAT4091-S	5Lt	02 pcs.
NAT4090.10-S	10Lt	
NAT4090.20-S	20Lt	

Sealers – Intermediate

Borma Naturaqua Line

Thixo High Solid Sealer NATURAQUA LOG SEALER

Ideal for the protection of exposed cut ends of beams and planks

A waterbased sealer, formulated to protect the ends of logs, beams, stakes and other wooden structures exposed to damp and adverse weather conditions. Also suitable for sealing longitudinal cracks. It blocks penetration of humidity into the wood, and prevents mildew formation thereby extending the useful life of the protective coating and the manufactured piece in general. Always apply before proceeding with application of coloured products to guarantee greater uniformity. Clear, it has excellent resistance against UV rays.



Recommendations for application:

The product can be tinted with Waterbased Pigments. Apply as a first intermediate product for waterbased finishing cycles or traditional solvent-based ones. Apply as the finale coat oil finishing cycles, to enable this material to penetrate the wood.



Customizable with Borma Colour System



Code	Desc.	Pack.
0310	750ml	06 pcs.
0311	2,5Lt	02 pcs.
0312	5Lt	
0310.20	20Lt	

Window Sealer NATURAQUA END GRAIN WINDOW SEALER

To improve protection of joints, doors, windows and fittings in general.

A specific sealer to protect corner joints of door and window fittings against humidity and surface deterioration. On the 45 degree joints, coverage of finishes is often weak, especially in the case of spray applications. As a consequence, the finish can start to flake and reduce the duration of the coatings protective function.



Recommendations for application:

After applying the exterior woodstain, lightly apply the sealer to joints and then sand. Complete the finishing cycle with Top Gel Thixo or Naturaqua Top Gel.



Code	Desc.	Pack.
0646	250 ml.	12 pcs.
0647	500 ml.	12 pcs.





ROOF-CLADDING FINISHES



WAX-BASED FINISHES Full Pigmented Finishing

Solid Colour Full Covering Finish

DEKORWACHS LASUR SOLID 3IN1 - Oil-Wax Based - Interior and Exterior

For cladding, roofing, windows and fences

Dekorwachs Lasur is a satin waxed finish for interiors and exteriors, in a special series of bright or pastel colours. Thixotropic, it gives excellent coverage and is highly resistant to light. The product is ready for use, demonstrating excellent elasticity, without any flaking or detachment over time. With a base of natural oils, high quality resins, UV filters and preservatives it protects the wood from biological agents and adverse weather conditions. The product is easy to apply and does not drip even when applied on vertical surfaces.



Recommendations for application:

Application of two coats is recommended. To renew the coating, simply apply a coat on the dry and clean surface. No need to sand.



Customizable with Borma Colour System



Code	Desc.	Pack.
3320XX-DEC	750 ml	06 pcs.
3322XX-DEC	2,5 Lt	02 pcs.
3330XX-DEC	5 Lt	02 pcs.
3344XX-DEC	10 Lt	
3340XX-DEC	20 Lt	

Solid Colour Full Covering Finish

NATURAQUA DEKORWACHS LASUR SOLID 3IN1 - Enriched with Oil-Wax - Interior and exterior

For cladding, roofing, windows and fences

Naturaqua Dekorwachs Lasur is a high-solid content, satin, water-based finish, suitable both for interiors and exteriors, in a special range of bright or pastel colours. It has excellent coverage power and high resistance against light. The product, ready for use, demonstrates excellent elasticity and is fast drying. With a high-quality resin base, UV filters and preservatives it protects the wood from biological agents and adverse weather conditions. The product, is easy to apply and is non-drip.



Recommendations for application:

For long term durability a minimum of two coats is recommended by brush or spray application. The level of protection offered by DEKORWACHS LASUR and NATURAQUA DEKORWACHS LASUR is very similar, however, when maintenance is required, the waterbased version requires intermediate sanding between the coats.



Customizable with Borma Colour System



Code	Desc.	Pack.
NAT3315XX-DEC	750 ml	06 pcs.
NAT3325XX-DEC	2,5Lt	02 pcs.
NAT3335XX-DEC	5Lt	02 pcs.
NAT3335.10XXDEC	10Lt	
NAT3335.20XXDEC	20Lt	

Protective UV Oil - High Solid

UV WEATHER OIL

A bespoke blend of oil, waxes and natural resins for the perfect finishing of exterior items. This transparent oil is recommended as a topcoat after staining. Thanks to its special UV-filters, it consistently prolongs life of coloured and raw wood, keeping it from greying and oxidation.



Recommendations for application:

Apply in one single layer after Holzwachs Lasur 3in1 or Dekorwachs Lasur 3in1 as a final protection.



Code	Desc.	Pack.
3933.UV	1 Lt.	06 pcs.
3934.UV	5 Lt	02 pcs.
3933.10.UV	10 Lt	
3933.20.UV	20 Lt	



Colour Chart

 <p>50 White</p>	 <p>133 Sage Green</p>	 <p>136 Pine Green</p>	 <p>115 Ivory</p>
 <p>42 Lobster</p>	 <p>06 Natural Mustard</p>	 <p>122 Orchid Orange</p>	 <p>125 Poppy red</p>
 <p>120 Sunshine yellow</p>	 <p>63 Dark Chocolate</p>	 <p>128 Red Mahogany</p>	 <p>59 Chocolate</p>
 <p>100 Ice grey</p>	 <p>140 Navy Blue</p>	 <p>81 Spring Green</p>	 <p>116 Dove Grey</p>





ROOF-CLADDING FINISHES



WAX-BASED FINISHES Natural Finishing

Translucent wood-tone finish

HOLZWACHS LASUR 3IN1 - Oil-Wax Based - Interior and Exterior

For cladding, roofing, window and fences

Holzwachs Lasur is a satin, impregnating self-sealing 3-in-1 finish, for interiors and exteriors, with a natural oil, wax and resin base. It can be diluted with products from the Solvoil range, penetrating the wood to create a decorative, protective and highly elastic layer on the surface. Water repellent and breathable, it does not flake. It contains UV filters and additives for wood protection. Application of two or three coats is recommended. To renew the coating, simply apply a coat on the dry and clean surface. There is no need to sand.



Recommendations for application:

Holzwachs Lasur 3IN1 creates a natural, satin effect. For a more decorative effect and greater protection, one or two coats of Weather Oil UV can be applied on it.



Customizable with Borma Colour System

Code	Desc.	Pack.
3320XX-3X1	750 ml	06 pcs.
3322XX-3X1	2,5 Lt	02 pcs.
3330XX-3X1	5 Lt	02 pcs.
3344XX-3X1	10 Lt	
3340XX-3X1	20 Lt	

Translucent Wood-Tone Finish

NATURAQUA HOLZWACHS LASUR 3IN1 - Oil-Wax Based Finish - Interior and exterior

For cladding, roofing, window and fences

A waterbased acrylic, waxy impregnating self-sealing 3-in-1 finish for interiors and exteriors. Odourless and dilutable in water it enhances the grain of the wood using natural and bright colours for deep penetration of the wood. Water repellent and breathable it protects the wood from atmospheric agents. Added UV filters impart light-stability and special additives protect the wood against harmful biological agents. Application of two or three coats is recommended.



Recommendations for application:

The colours of Naturaqua Holzwachs Lasur 3IN1 are brighter than the same Holzwachs Lasur 3IN1 oil-wax base. The level of protection offered by the two products is very similar, however the water-based version needs intermediate sanding between the coats and restoration phase.



Customizable with Borma Colour System

Code	Desc.	Pack.
NAT3305XX-3X1	375 ml	06 pcs.
NAT3315XX-3X1	750 ml	06 pcs.
NAT3325XX-3X1	2,5 Lt	02 pcs.
NAT3335XX-3X1	10 Lt	
NAT3345XX-3X1	20 Lt	

High Solid, Deep Penetrating Waxed Impregnating Agent

HOLZWACHS LASUR HD50

A blend of natural oils, waxes and resins formulated for coating indoor / outdoor wood paneling. Self-sealing, it provides colour and long-lasting protection due to deep penetration of the wood fibres and high solid content, applied in two or three coats. Also suitable for metallic decorative effects.



Recommendations for application:







HD50 is characterised by an extremely easy application thanks to its high viscosity and excellent brushability. Very easy maintenance (no sanding required).



Customizable with Borma Colour System

Code	Desc.	Pack.
3320XX-HD	750 ml	06 pcs.
3322XX-HD	2,5 Lt	02 pcs.
3330XX-HD	5 Lt	02 pcs.
3344XX-HD	10 Lt	
3340XX-HD	20 Lt	

Colour chart

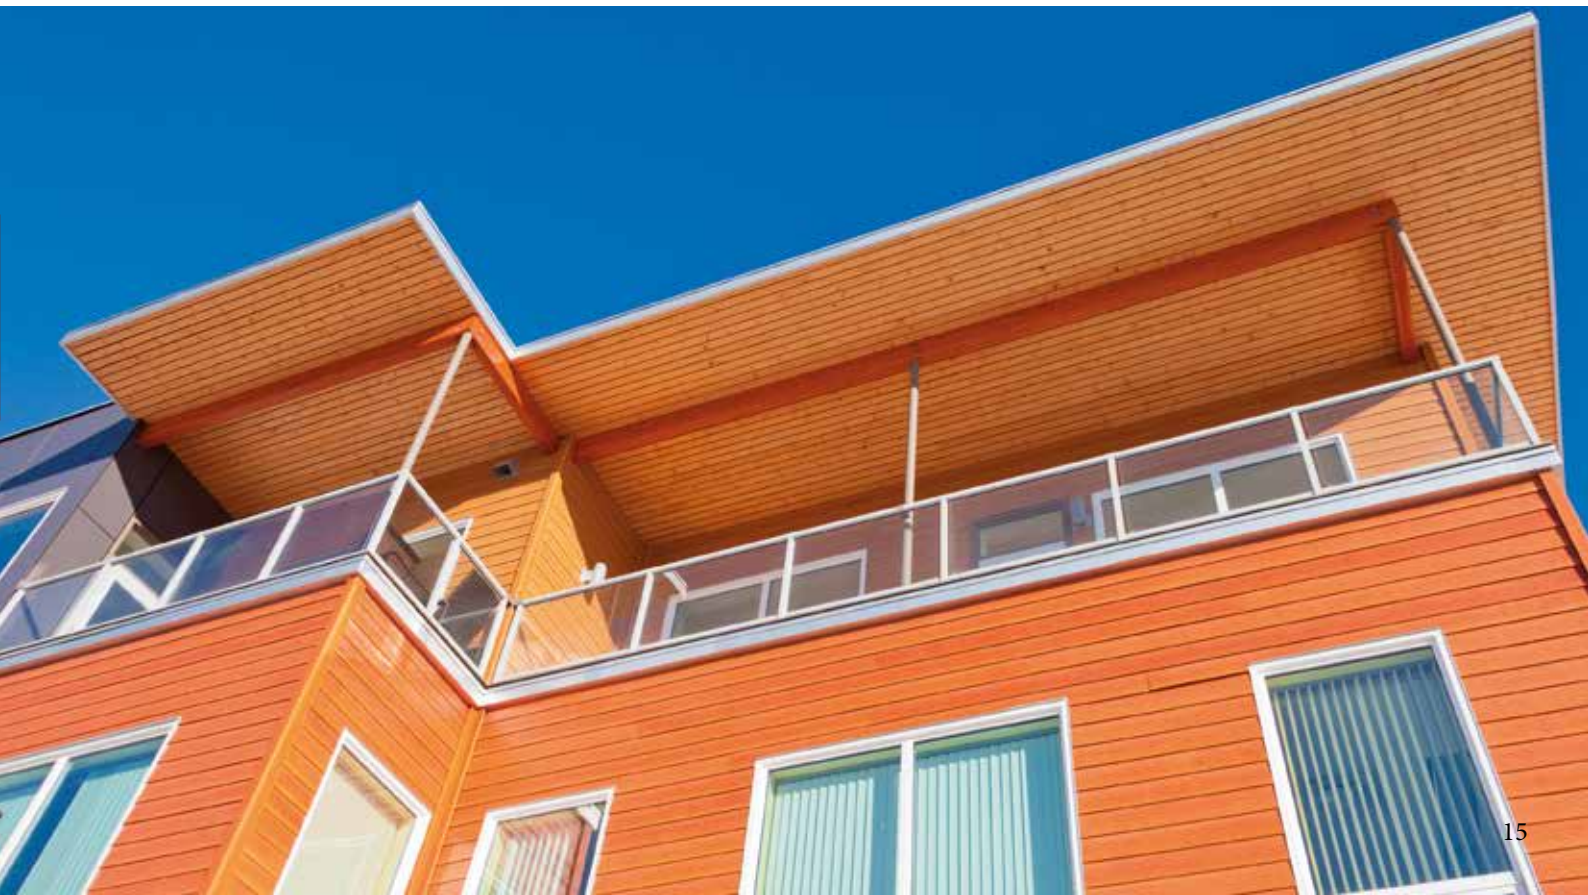



ROOF/CLADDING



EXTERIOR WOODSTAINS AND FINISHES Borma Classic Line

Translucent Exterior Woodstain

HOLZ LASUR

Ideal for protection and wood colouration

Protective and decorative exterior woodstain for interiors and exteriors with depth wetting properties. It colours the wood, enhancing the grain. It contains UV filters and antiseptic additives that provide effective protection against fungi and insects. Colours are light resistant and have good resistance to atmospheric agents.



Recommendations for application:

Naturaqua Holz Lasur colours are normally brighter, however solvent-based Holz Lasur is characterised by a better penetration and protection capacity. Apply by brush, spray, dipping.



Customizable with Borma Colour System



Code	Desc.	Pack.
3610XX	375 ml	06 pcs.
3611XX	750 ml	06 pcs.
3612XX	2,5 Lt	02 pcs.
3613XX	10 Lt	
3614XX	20 Lt	

Decorative Wax Finish

TOP GEL TIXO - Thixotropic Wax Finish - Non-Drip

TOP GEL TIXO HS - High Solid Wax Finish - High performance

(Interior/Exterior use)

An alkyd-urethane based wax finish offering long term durability for interiors and exteriors. It enhances the wood grain with natural and bright colours, deeply penetrating the wood. Water repellent, breathable and containing UV filters it protects the wood from atmospheric agents. Additionally, it contains antiseptic additives to protect the wood against harmful biological agents. Application of two coats is recommended. To renew the coating, simply apply a coat on the dry and clean, preliminary sanded surface.



Recommendations for application:

To enhance coating performances, apply Holz Lasur as a first coat.



Customizable with Borma Colour System





TIXO - Solid 36%

Code	Desc.	Pack.
3305XX	375 ml	06 pcs.
3315XX	750 ml	06 pcs.
3325XX	2,5 Lt	02 pcs.
3315.10XX	10 Lt	
3315.20XX	20 Lt	

TIXO HS - Solid 70%

Code	Desc.	Pack.
3315XX-HS	750 ml	06 pcs.
3325XX-HS	2,5 Lt	02 pcs.
3315.10XX-HS	10 Lt	
3315.20XX-HS	20 Lt	

Colour Chart



TRADITIONAL EXTERIOR WOODSTAINS AND FINISHES

Borma Naturaqua Line

Waterborne Exterior Woodstain

NATURAQUA HOLZ LASUR

Ideal for protection and wood coloration

A waterbased protective and decorative woodstain for interiors and exteriors which colours the wood and enhances the grain. Colours are light resistant due to the inclusion of UV filters whilst special additives provide efficient protection against fungi and insects. Good resistance to atmospheric agents.



Recommendations for application:

To optimise the lifespan of the coating it is recommended that a finishing coat of Naturaqua Top Gel is applied. Recommended application: brush, spray, dipping.



Customizable with Borma Colour System



Code	Desc.	Pack.
NAT3610XX	375 ml	06 pcs.
NAT3611XX	750 ml	06 pcs.
NAT3612XX	2,5 Lt	02 pcs.
NAT3613XX	10 Lt	
NAT3614XX	20 Lt	

Decorative Exterior Finish

NATURAQUA TOP GEL

Waterbased Top Coat

A flexible, transparent and odourless waterbased waxy acrylic perfect for exterior use. Thanks to the high solid content, it enables a substantial protective film to be applied. It guarantees efficient protection against UV radiation. Available: matt and semi-gloss.



Recommendations for application:

If necessary, the product can be diluted with water, however to preserve the technical features of the coating, the quantity of water must not exceed 10%.



Customizable with Borma Colour System




Top Gel 60 Semi-gloss

Code	Desc.	Pack.
NAT3350XX-60	375ml	06 pcs.
NAT3351XX-60	750 ml	06 pcs.
NAT3352XX-60	2,5 Lt	02 pcs.
NAT3351.10XX-60	10 Lt	
NAT3351.20XX-60	20 Lt	

Top Gel 30 Semi-matt

Code	Desc.	Pack.
NAT3350XX	375 ml	06 pcs.
NAT3351XX	750 ml	06 pcs.
NAT3352XX	2,5 Lt	02 pcs.
NAT3351.10XX	10 Lt	
NAT3351.20XX	20 Lt	

Colour chart



VARNISHES

Special Boat and Marine Lacquers

FLATTING EXTRA MARINE

For boat decks, exterior coatings and floors

High solid, high quality lacquer, ready for use, with excellent elasticity and high filling power. Prevents cracks and flaking. Suitable both for interior and exterior use, also on exotic wood. Enriched with UV filters, it forms a high-build protective film, resistant to water and adverse weather conditions. Available in Semi-Matt (30 gloss) and Gloss (80 gloss) finish. Non-dripping.



Recommendations for application:

For preliminary colouration of the surfaces, apply Holz Lasur Exterior Woodstain, then proceed to finish with two coats of Flattening Extra Marine. To give extra long-life protection Flattening Extra Marine can be directly pigmented with Borma Oil Concentrates COXX.



Customizable with Borma Colour System

Glossy

Code	Desc.	Pack.
3925XX	375 ml	06 pcs.
3926XX	750 ml	06 pcs.
3927XX	2,5 Lt	02 pcs.
3928.10XX	10 Lt	
3929.20XX	20 Lt	

Semi-Matt

Code	Desc.	Pack.
3925XX-30	375 ml	06 pcs.
3926XX-30	750 ml	06 pcs.
3927XX-30	2,5 Lt	02 pcs.
3928XX-30	10 Lt	
3929XX-30	20 Lt	

NATURAQUA FLATTING EXTRA MARINE

For boat decks, exterior coatings and floors

A self-sealing waterborne lacquer, ready for use and especially formulated for the nautical sector, with high elasticity and filling capacity. Ecofriendly, with very low emissions its special UV filters and additives impart excellent protection wood and its deep penetration provides a perfect resistant film that resists water and adverse weather conditions, enhancing the appearance and its natural beauty.



Recommendations for application:

For preliminary colouration of the surfaces, the application of Naturaqua Holz Lasur Exterior Woodstain, is recommended followed by two coats of Naturaqua Flattening Extra Marine. To further enhance its long term durability, Naturaqua Flattening Extra Marine can be directly tinted with Borma Waterbased Pigments.



Customizable with Borma Colour System

Glossy

Code	Desc.	Pack.
NAT3925XX	375 ml	06 pcs.
NAT3926XX	750 ml	06 pcs.
NAT3927XX	2,5 Lt	02 pcs.
NAT3928.10XX	10 Lt	
NAT3929XX	20 Lt	

Semi-Matt

Code	Desc.	Pack.
NAT3925XX-30	375 ml	06 pcs.
NAT3926XX-30	750 ml	06 pcs.
NAT3927XX-30	2,5 Lt	02 pcs.
NAT3928.10XX-30	10 Lt	
NAT3929XX-30	20 Lt	





EQUIPMENT

OIL APPLICATION BRUSHES

Special for Floors and Decks

Special brushes for the application of oils and paints on interior and exterior floors. In natural bristle, they enable easy and fast application on wide surfaces such as terraces and decks. Wash with specific solvent after use. Sizes available: 150mm, 250mm, 380mm.

380mm



250mm



150mm



Code	Size
6394.380	380mm
6394.250	250mm
6394.150	150mm

CAN OPENING SPATULA

Universal

A 28cm long metal spatula for opening cans and mixing products or pastes. The polymer handle ensures an ergonomic grip, while the steel structure makes the spatula resistant to chemical agents and mechanical stress. Ideal for mixing products contained in medium-small packaging.



Code
6448





GARDEN FURNITURE



OILS

Wood Oil TEAK OIL

Ideal for the treatment of garden furniture and other exterior surfaces

An oil-based product, ready for use, suitable for all wooden surfaces, both interior and exterior. It makes the surface water-repellent and gives the surface a pleasantly natural appearance. Also suitable for dipping. Protects against atmospheric and biological agents and enhances the natural beauty of the wood. Clear or pigmented, it does not flake and does not require sanding.



Recommendations for application:

It can be used alone as a periodic treatment of surfaces or as a coloured base before finishing with a transparent oil (e.g. Decking Oil HD – Danish Oil).



Customizable with Borma Colour System

Code			Desc.	Pack.
0360	0360-DSXX	0360-LSXX	500 ml	12 pcs.
EN0361	EN0361-DSXX	EN0361-LSXX	1 Lt	06 pcs.
0362	0362-DSXX	0362-LSXX	5 Lt	02 pcs.
0365	0365-DSXX	0365-LSXX	10 Lt	
0365.20	0365.20-DSXX	0365.20-LSXX	20Lt	
DSXX (dark shades): 1011+1461+1471+581+601+621+631				
LSXX (light shades): 171+172+301+511+927				

Waterbased Teak Oil NATURAQUA TEAK OIL

Interior/Exterior Use

Oils in aqueous dispersion reinforced with resin ready for use for interiors and exteriors. Odour-free, the product provides a non-greasy, protective film which is perfectly water-resistant, with a pleasant satin appearance. Easily applied, the oil penetrates deeply to protect the wood from adverse weather conditions and harmful agents, developing tone and natural beauty. Enriched with UV filters.



Recommendations for application:













Do not apply on heated wood, or in direct sunlight.



Customizable with Borma Colour System

Code			Desc.	Pack.
NAT0360	NAT0360-LSXXXX	NAT0360-DSXXXX	500 ml	12 pcs.
NAT0361	NAT0361-LSXXXX	NAT0361-DSXXXX	1 Lt	06 pcs.
NAT0362	NAT0362-LSXXXX	NAT0362-DSXXXX	5 Lt	02 pcs.
NAT0365	NAT0365-LSXXXX	NAT0365-DSXXXX	10 Lt	
NAT0365.20	NAT0365.20-LSXX	NAT0365.20-DSXX	20Lt	
DSXX (dark shades): 1011+1461+1471+581+601+621+631				
LSXX (light shades): 171+172+301+511+927				

Colour chart

 171 Natural Teak	 511 Oak	 927 Larch	 172 Teak
 301 Cherry	 621 Mahogany	 581 Rosewood	 1471 Wenge
 631 Dark Oak	 1461 Green Pine	 1011 Grey	 601 Ebony

ZERO EMISSIONS
0 ECO-Impact



VOC FREE OILS

Pure Vegetable Oil

TUNG OIL

Natural Oil for Wood Protection

100% Natural Oil obtained from the fruit of the Tung tree. It offers good surface hardness and resistance against humidity. With a light amber colour, Tung Oil is a traditional product to protect wood from atmospheric agents.



Recommendations for application:

To increase the level of absorption and improve durability, dilute with Solvoil Plus (or another product from the Solvoil range) in the ratio 1:1. Apply in multiple coats, with adequate intermediate drying, up to saturation of the surface. After 24 hours, you can polish the surface with steel wool 0000 or with a white abrasive pad.



Code	Desc.	Pack.
3990	125 ml.	12 pcs.
3991	500 ml.	12 pcs.
3992	1 Lt.	12 pcs.
3993	5 Lt.	02 pcs.
3994	20 Lt.	

Oil Finishes for Exteriors

ECO PREMIUM EXTERIOR WOOD OIL

To Treat all Exterior Surfaces

With a base of natural oils enriched with UV filters, the product guarantees the protection of all exterior surfaces without releasing VOC and with a pleasantly natural effect. It does not peel and is suitable for all types of wood. It contains active ingredients that protect the substrate from harmful agents.



Recommendations for application:

The product can be coloured with Borma Oil Pigments (3-5% for semi-transparent colours, 10-15% for coating colours). The addition of the pigments imparts longer duration of the coating.



Code	Desc.	Pack.
VOC0378XX	500 ml	06 pcs.
VOC0379XX	1 Lt	06 pcs.
VOC0379XX.5	5 Lt	02 pcs.
VOC0379XX.10	10 Lt	
VOC0379XX.20	20Lt	

Colour chart

08 Clear



05 Pine



16 Cherry



17 Teak



53 Light Walnut



63 Dark Walnut



62 Mahogany





TERRACES AND DECKING



OILS

Finishes for Terraces

TERRACE OIL - Decking Oil Natural

Ideal for the treatment and protection of terraces, decks, stairs and walkways in wood.

A high-quality decking oil formulated on the basis of reinforced, natural oils, with a high penetration coefficient. Thanks to its low viscosity, it penetrates deep into the wood whilst its high solid content gives efficient protection and breathability without the potential for flaking. It gives a natural, satin effect. Enriched with UV filters and antiseptic additives, the product is characterised by extremely easy application, even when coloured, and requires no sanding for maintenance schedules.



Recommendations for application:





To obtain a more decorative effect and greater protection apply a coat of Decking Oil HD – Danish Oil as the final coat. Restore without sanding.



Customizable with Borma Colour System

Code			Desc.	Pack.
4971-IL	4971IL-DSXXXX	4971IL-LSXXXX	1 Lt	06 pcs.
4977IL.2,5	4977IL-DSXXXX	4977IL-LSXXXX	2,5 Lt	02 pcs.
4972-IL	4972IL-DSXXXX	4972IL-LSXXXX	5 Lt	02 pcs.
4975-IL	4975IL-DSXXXX	4975IL-LSXXXX	10 Lt	
4973-IL	4973IL-DSXXXX	4973IL-LSXXXX	20Lt	
DSXX (dark shades): 1012+1462+1472+50+582+601+622+632				
LSXX (light shades): 173+174+302+512+729				

Colour Chart

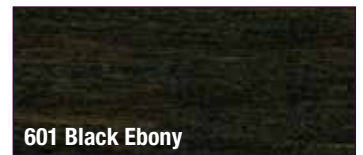

Danish Oil DECKING OIL HD

For Exterior Wood

A highly decorative special oil mixture with low environmental impact. Odour-free and with high breathability, it protects every type of wood. It is characterised by rapid drying and its special UV filters and preservatives make it perfect for exterior use. Formaldehyde-free and available in 6 shades (see Colour Chart) plus Clear.



Recommendations for application:

Recommended as a transparent finish, it can be applied over various coloured products including Holz Lasur, Holzschutz Lasur 3IN1 and Teak Oil to increase its protection coefficient.



Customizable with Borma Colour System



Code	Desc.	Pack.
4971XX	1 Lt	06 pcs.
4977XX	2,5 Lt	02 pcs.
4972XX	5 Lt	02 pcs.
4975XX	10 Lt	
4973XX	20Lt	

Waterbased Oil NATURAQUA DECKING OIL

For Exterior Wood

Naturaqua Decking Oil is a blend of emulsified oils in water reinforced with resins to treat wood intended for outdoor environments. Supplied ready for use, over time, it can deteriorate but does not flake and is easily revitalised. It is easy to apply and has excellent penetration. Produced with the highest quality raw materials and enriched with special UV filters, it guarantees excellent protection against atmospheric agents. Especially for exterior wood. Available in 6 shades (see Colour Chart) plus Transparent/Clear.



Recommendations for application:

Do not apply on heated wood or in direct sunlight.



Customizable with Borma Colour System



Code	Desc.	Pack.
NAT4971XX	1 Lt	06 pcs.
NAT4973XX	2,5 Lt	02 pcs.
NAT4974XX	5 Lt	02 pcs.
NAT4976XX	10 Lt	
NAT4975XX	20Lt	

Two Components Oil DECKING OIL 2K

For Exterior Wood - High Performance - VOC FREE

Mix of natural oils, with zero emissions, especially formulated to protect exterior wooden surfaces. Enriched with UV filters and preservatives, it guarantees advanced protection against atmospheric and biological agents. The addition of the catalyser increases its surface performance, making it an ideal finish for terraces and decks in exotic wood. Odour-free, available in the colours on the chart, it can be customised to your desired colour using the oil pigments.



Recommendations for application:

Supplied ready for use. To facilitate brush application dilution with Solvoil Plus is recommended but this must be after adding the catalyst. Avoid application on heated surfaces or in direct sunlight. Application of the product must be carried out as evenly and continuously as possible, without stopping.



Customizable with Borma Colour System



Code	Desc.	Pack.
49712K + 4971K	1 Lt + 300 ml	06 pcs.
49772K + 4972K	2,5 Lt + 750 ml	02 pcs.
49722K + 4975K	5 Lt + 1,5 Lt	02 pcs.
49752K + 4974K	10 Lt + 3Lt	
49732K + 4973K	20 Lt + 6 Lt	

Decking Oils Colour chart

08 Clear



05 Pine



16 Cherry



17 Teak



53 Light Walnut



63 Dark Walnut



62 Mahogany





TERRACES AND DECKING



OILS - Specialties

Finishes for Thermo-Treated Wood

THERMOWOOD OIL

Specific formulation for deep penetration

Thermo-treated wood is very dense and compact which often prevents proper adhesion of conventional finishing products. Thermowood Oil is formulated specifically for deep penetration and therefore to be well-absorbed also by difficult surfaces with minimum wetting. Enriched with UV filters and protective additives it creates a protective film resistant to wear. It is ideal for all manufactured pieces in heat-treated wood including floors, terraces and decks. Available in 4 colours with a natural effect, plus clear. Application of at least two coats is recommended.



Recommendations for application:


The product is ready for use, but in the event of particularly dense/compact surfaces, the first coat of Thermowood Oil can be diluted at 50% with Solvoil 06, Slow Drying Solvent. Subsequent coats should not be diluted.



Customizable with Borma Colour System

Code	Desc.	Pack.
4978XX	1 Lt	06 pcs.
4979XX	5 Lt	02 pcs.
4978XX.20	20 Lt.	

Colour Chart



08 Natural



53 Light



59 Medium



63 Dark





LACQUERS

Borma Classic Line

EXTERIOR WOOD LACK 2k

For Exterior Wood - High Performance

A two-component lacquer ideal for exterior flooring and wooden surfaces in general, with a pleasant decorative effect. It gives excellent protection against atmospheric agents and normal wear, guaranteeing a long duration over time.

Available in the following gloss levels: Natural Effect 0-5%, Semi-Matt 20-30%, Satin 50-60%, glossy 80-90%. Available also in THIXO version for vertical surfaces.



Recommendations for application:

A specific primer is not required, but Holz Lasur can be applied as a first coat to ensure the coating lasts longer. Recommended application of two or three coats, with a roller, spray or brush. Avoid application on heated surfaces or in direct sunlight.



Customizable with Borma Colour System

EXTERIOR WOOD LACK 2K (catalysis ratio 1:1)		
Code	Desc.	Pack.
41102K-XX + 4110K	1Lt + 1Lt	6+6 pcs.
41112K-XX + 4111K	2,5 Lt + 2,5 Lt	2+2 pcs.
41122K-XX + 4112K	5 Lt + 5Lt	2+2 pcs.
41142K-XX + 4114K	20 Lt + 20 Lt	

Borma Naturaqua Line

NATURAQUA EXTERIOR WOOD LACK 2K

For Exterior Wood - High Performance

A two component waterbased lacquer ideal for exterior flooring and wooden surfaces in general, with a pleasant decorative effect. It gives excellent protection against atmospheric agents and against normal wear. Being natural it does not affect the wood shade. Available in deep matt, matt, semi-gloss and glossy sheen levels.



Recommendations for application:

To guarantee the best performance dilute the first coat 1:1 with water or Wood Sealer. Avoid application on heated surfaces or in direct sunlight. Catalysis ratio: 10:1 - Pot life: 2-3 hours at 20°C.



Customizable with Borma Colour System

NAT. EXTERIOR WOOD LACK 2K (catalysis ratio 10:1)		
Code	Desc.	Pack.
NAT41102K-XX + NAT4099-2K	1Lt + 100ml	6+6 pcs.
NAT41112K-XX + NAT4100-2K	2,5Lt + 250ml	2+2 pcs.
NAT41122K-XX + NAT4101-2K	5Lt + 500ml	2+2 pcs.
NAT41142K-XX + NAT4103-2K	20Lt + 2Lt	



CLEANERS

Wooden Floor Cleaner NATURAQUA DECK SOAP

Waterbased pH-Neutral Cleaner

Suitable for all types of wood finishes and ideal for routine cleaning of decking, fencing, furniture and other exterior surfaces, oiled or lacquered. It efficiently removes dirt and grease without damaging the wood. Suitable for daily use. Dilute 5-10% of the product with mains water.



Recommendations for application:

Apply the diluted product using soft brushes or synthetic mops, rub lightly and rinse.



Code	Desc.	Pack.
0026	1 Lt	12 pcs.
0027	5 Lt	02 pcs.
0026.10	10 Lt	
0026.25	25 Lt	

Daily Cleaner NEUTRAL SOAP FOR WINDOW FRAMES

With Essential Cedar Oil

A waterbased soap for door and window fittings by Borma is the perfect solution for frequent cleaning of exterior surfaces in wood in general. Ecological, it delicately cleans all types of lacquered wood, guaranteeing total removal of dirt and stains. Thanks to the essential oil content, it gives the treated surface a pleasant cedar scent.



Recommendations for application:

Apply in multiple applications on particularly stubborn stains. It does not require any type of rinsing.



Code	Desc.	Pack.
NAT0020	500 ml	12 pcs.
NAT0021	1Lt	12 pcs.
NAT0021.5	5 Lt	02 pcs.
NAT0021.25	25 Lt	



REGENERATING PRODUCTS

Maintenance Oil

EXTERIOR OIL REFRESHER

Ideal for Maintenance of Exterior Wood Previously Treated with Oils

Exterior Oil Refresher replenishes and regenerates every surface type, giving enhanced protection to the original oil finish of the manufactured piece. The presence of UV filters and special additives protect the wood from harmful agents, from direct sunlight and adverse weather conditions. It highlights the natural beauty of the wood with a natural, satin effect.



Recommendations for application:

Recommended for seasonal maintenance of flooring and surfaces in general.



Code	Desc.	Pack.
3974	500 ml	12 pcs.
3975	1 Lt	12 pcs.
3975.05	5 Lt	02 pcs.
3975.20	20 Lt	

Door and Window Fittings Maintenance

WATER-BASED REFRESHER FOR WINDOW FRAMES

Special Mix of Acrylic Resin Dispersed in Water, Formulated for the Correct Maintenance of fittings.

Applied annually, it efficiently prolongs the life of the exterior finish, replenishing it and giving strength and shine to worn lacquer. Odour-free, excellent application and easy to use. It can be applied on both waterbased and solvent-based finishes.



Recommendations for application:

Apply a film with a cloth on the clean surface and leave to dry without rubbing.



Code	Desc.	Pack.
NAT3908	500 ml	12 pcs.
NAT3909	1Lt	12 pcs.
NAT3909.5	5 Lt	02 pcs.
NAT3909.25	25 Lt	

Door and Window Fittings Maintenance

OIL REFRESHER FOR WINDOW FRAMES

Special Mix of Natural Oils and Resins, Ideal for the Care of Fittings

Oil Refresher efficiently restores and protects the wooden surface of windows, doors and fittings in general previously finished with oil or lacquer.



Recommendations for application:

Application is recommended once a year to prolong the duration of the coating.



Code	Desc.	Pack.
3907	250 ml	12 pcs.
3908	500 ml	12 pcs.
3909	1 Lt	12 pcs.
3909.5	5 Lt	02 pcs.



Maintenance Recommendations

You are advised to avoid product application during periods of maximum exposure to the sun and heated supports.

Assessing Maintenance Frequency

Surface Stress Test	Horizontal Surfaces	Vertical Surfaces	Type of Wood
High: Maximum Exposure	seasonal	Every 2-4 years	Oak or Larch
Medium: Partial Exposure	annual	Every 5-7 years	Pine or Fir
Low: Minimum Exposure	Every 3 years	Every 7-10 years	Pine or Fir



Recommended Application Cycles

RENEW EXTERIOR WOODEN SURFACES - ECOLOGICAL CLEANING IN TWO STEPS:

EXTRA-INTENSIVE CYCLE: Extra Strong Wood Cleaner + Exterior Wood Cleaner



1	<p>Soak the surface with water prior to application</p> <p>0091 Naturaqua Extra Strong Wood Cleaner</p>	<ul style="list-style-type: none"> • Apply in slight excess • Application time: 15-30 minutes • Approximate yield: 10 m²/l
	<p>Rub and Rinse</p>	
2	<p>0075 Naturaqua Exterior Wood Cleaner</p>	<ul style="list-style-type: none"> • Apply evenly on wet • Drying time: 4-6h at 20°C • Approximate yield: 10 m²/l
	<p>For a particularly smooth result, you are advised to sand before applying a new finish</p> <p>Recommendations for subsequent finishing: Ideal for oils: Terrace Oil, Thermowood Oil, Teak Oil, Decking Oil HD Avoid waterbased products</p>	

All finishing products are intended as being pigmented

Recommended Application Cycles

WHITENING AND PROTECTION OF WOODEN BEAMS, CEILINGS AND SURFACES IN GENERAL:

Whitening 2K Super Cleaner + Holzwachs Lasur Alf Heavy Duty Insulator



1	0062 Whitening 2k Super Cleaner	PRODUCT FOR PROFESSIONAL USE: <ul style="list-style-type: none"> Wear safety gloves and goggles Ask for the Technical Data Sheet
	Only use plastic tools and rinse	
	Leave to dry	12-24 h a 20°C
	For a particularly precise result, you are advised to sand	
2	3320-ALF Holzwachs Lasur Heavy Duty Insulator	<ul style="list-style-type: none"> Drying time – 8h Sanding – not necessary Approximate yield 14-16 m2/lt
	Recommendations for subsequent finishing: Overcoat with both oils and waterbased products, as well as using traditional products	



WATER BASED CYCLE WITH EXTERIOR WOODSTAINS AND WAXY FINISHES: DURATION 5-7 YEARS

Remove traces of oil, grease, dirt, dust, previous finishes



1	NAT3630 Naturaqua Borma Shield <i>Special Primer</i>	<ul style="list-style-type: none"> Drying time - 2h Sanding – not necessary Approximate yield 16-20 m2/l
2	NAT3610 Naturaqua Holz Lasur <i>Exterior Woodstain</i>	<ul style="list-style-type: none"> Drying time - 4h Sanding – not necessary Approximate yield 16-20 m2/l
3	0310 Naturaqua Log Sealer <i>Sealer</i>	<ul style="list-style-type: none"> Drying time - 4h Sanding – not necessary
4	NAT3350 Naturaqua Top Gel <i>Waxy Finish</i>	<ul style="list-style-type: none"> Drying time –3h Sanding - yes Approximate yield – 10-14 m2/l
5	NAT3350 Naturaqua Top Gel <i>Waxy Finish</i>	<ul style="list-style-type: none"> Drying time – 24h Approximate yield – 10-14 m2/l





Recommended Application Cycles

TRADITIONAL CYCLE WITH EXTERIOR WOODSTAINS AND WAXED FINISHES: DURATION 5-7 YEARS




	Remove all traces of oil, grease, dirt, dust and previous finishes	
	1 3630 Borma Shield <i>Special Primer</i>	<ul style="list-style-type: none"> • Drying time – 12 - 24 h • Sanding – not necessary • Approximate yield – 16-20 m2/l
	2 3610 Holz Lasur <i>Exterior Woodstain</i>	<ul style="list-style-type: none"> • Drying time – 12-24h • Sanding – not necessary • Approximate yield – 10-14 m2/l
	3 0310 Naturaqua Log Sealer <i>Sealer</i>	<ul style="list-style-type: none"> • Drying time - 4h • Sanding – not necessary
	4 3305 Top Gel Tixo <i>Waxy Finish</i>	<ul style="list-style-type: none"> • Drying time 8-12h • Sanding - yes, grain 240 • Approximate yield 12-16 m2/l
	5 3305 Top Gel Tixo <i>Waxy Finish</i>	<ul style="list-style-type: none"> • Drying time 24h • Approximate yield 12-16 m2/l

All finishing products are intended as being pigmented and contain UV filters and preservatives





Recommended application cycles

TERRACE AND DECK OIL FINISH – DECORATIVE EFFECT - Restore Annually



	Remove all traces of oil, grease, dirt, dust and previous finishes	
	1 0360 Teak Oil	<ul style="list-style-type: none"> • Drying time – 4-6h • Sanding – not necessary • Approximate yield – 14-16 m2/l
	2 4971 Decking Oil HD	<ul style="list-style-type: none"> • Drying time – 8-12 • Sanding – not necessary • Approximate yield - 16-20 m2/l
	3 4971 Decking Oil HD	<ul style="list-style-type: none"> • Drying time – 24h • Approximate yield – 16-20 m2/l

TERRACE AND DECK OIL FINISH – NATURAL EFFECT - Restore Annually

	Remove traces of oil, grease, dirt, dust, previous finishes	
	1 4971-IL Terrace Oil - Decking Oil Natural	<ul style="list-style-type: none"> • Drying time – 10-12h • Sanding – not necessary • Approximate yield - 16-20 m2/l
	2 4971-IL Terrace Oil - Decking Oil Natural	<ul style="list-style-type: none"> • Drying time – 24h • Approximate yield – 16-20 m2/l

OIL FINISH FOR TERRACE AND WOODEN FURNITURE IN HEAT-TREATED WOOD




Restore Annually

	Remove traces of oil, grease, dirt, dust, previous finishes	
	1 4978 Thermowood Oil	<ul style="list-style-type: none"> • Drying time – 8-12h • Sanding – not necessary • Approximate yield -20-24m2/l
	2 4978 Thermowood Oil	<ul style="list-style-type: none"> • Drying time – 24h • Approximate yield – 20-24 m2/l



Recommended Application Cycles



OIL FINISH FOR TERRACES AND DECKS – HIGH PERFORMANCE




	Remove all traces of oil, grease, dirt, dust and previous finishes	
1	 <p>Optional/suggested: NAT3630 Naturaqua Borma Shield <i>Special Primer</i></p>	<ul style="list-style-type: none"> • Drying time – 2h • Sanding – not necessary • Approximate yield - 16-20 m²/l
2	 <p>49712K Decking Oil 2K</p>	<ul style="list-style-type: none"> • Drying time - 8-12 h • Sanding - no • Approximate yield – 30-50 m²/l
3	 <p>49712K Decking Oil 2K</p>	<ul style="list-style-type: none"> • Drying time – 24-36h • Approximate yield – 30-50m²/l

WATER-BASED OILS FOR TERRACES AND DECKS: Restore Annually

	Remove all traces of oil, grease, dirt, dust and previous finishes	
1	 <p>NAT4971 Naturaqua Decking Oil</p>	<ul style="list-style-type: none"> • Drying time – 8h • Sanding – not necessary • Approximate yield -14-16 m²/l
2	 <p>NAT4971 Naturaqua Decking Oil</p>	<ul style="list-style-type: none"> • Drying time – 24-36h • Approximate yield -14-16 m²/l

Recommended Application Cycles

HIGH PERFORMANCE, 2K LACQUER FOR TERRACES - DECORATIVE EFFECT:

	Remove all traces of oil, grease, dirt, dust and previous finishes	
	1 3610 Holz Lasur	<ul style="list-style-type: none"> • Drying time – 12 - 24 h • Sanding – not necessary • Approximate yield – 10-14 m²/l
	2 Exterior Wood Lack 2K	<ul style="list-style-type: none"> • Drying time – 12 h • Sanding yes – grain 150 -180 • Approximate yield – 10-14 m²/l • Recommended use 100-120 g/m²
	3 Exterior Wood Lack 2K	<ul style="list-style-type: none"> • Drying time – 24 - 48h • Sanding – grain 150 - 180 in case of three coat cycle • Approximate yield – 10-14 m²/l

HIGH PERFORMANCE, 2K WATER-BASED LACQUER WITH HIGH PERFORMANCE FOR TERRACES - DECORATIVE EFFECT:

	Remove all traces of oil, grease, dirt, dust and previous finishes	
	1 NAT3610 Naturaqua Holz Lasur	<ul style="list-style-type: none"> • Drying time – 4h • Sanding – yes • Approximate yield – 16-20 m²/l
	2 Naturaqua Exterior Wood Lack 2k	<ul style="list-style-type: none"> • Drying time – 12h • Sanding – yes • Approximate yield – 10m²/l
	3 Naturaqua Exterior Wood Lack 2k	<ul style="list-style-type: none"> • Drying time – 36h • Approximate yield – 10m²/l

All finishing products are intended as being pigmented and contain UV filters and preservatives





Point

Authorised dealer







BORMA WACHS[®]
Wood Professional Cosmetics
& Eco-Finishes



Restauro - Restoration - Restaurierung
Материалы для реставрации



Ritocco e stucchi - Touch-Up and Fillers - Retusche und Kitte
Ремонт покрытий



Esterni - Exteriors - Aussenbereich - Экстерьеры



Interni - Interiors - Innenbereich - Интерьеры



Doratura - Gilding - Vergoldung - Золочение



Decorazione - Decoration - Dekoration - Декорирование



Borma Pro



Borma Colors



www.bormawachs.com

B.P.S. s.r.l.

Via Industria, 4 - 30029 San Stino di Livenza
Venezia Italy
Tel. +39 0421 951900 - Fax +39 0421 951902

Wood Professional Cosmetics & Eco-Finishes